



# ELECTRIC AUTOMATIC RICE COOKER



FRC162NB



FRC54NB



FRC108NB

**VARIATION** One-unit, two-unit or three-unit types are available according to the use purpose.

## FUNCTIONAL COMPONENTS AND PARTS

**Thermistor:** The thermistor uses steam-catching method to sense the preset temperature of steam coming from the pan and automatically turns the heater off instantly.

**Cooking Adjusting Switch:** This Switch provides fine condition adjustment to cooking to obtain rice of the desired quality.

**Steaming Buzzer:** The buzzer sounds after 15 minutes of steaming, at the end of the cooking cycle.

**Heater:** Sheath Heater SUS 304.

**Drawer:** Pull the drawer fully outwards and downwards. The cooking pan within the drawer is emerged so that it may be taken out without putting your hand into the hot area.

**Cooking Pan:** A round type pan with a measurement scale marked on the side.

**STRUCTURE AND MATERIALS** The main body is a compact unit on which one or more units may be stacked.

**Outer Finish:** Color steel plate 22 U.S.G. (0.8 mm).

**Inner Finish:** Aluminum-plated steel 18 U.S.G. (1.2 mm)


**Outer Finish of Door:** Stainless steel SUS 430 19 U.S.G. (1.0 mm).

**Inner Finish of Door:** Stainless steel SUS 430 18 U.S.G. (1.2 mm).


**Adjustable Legs:** Stainless steel SUS 304. Adjustable within the range of  $\pm 15$  mm.

**Heat Insulator:** Glass wool.


**Cooking Pan:** A round type and teflon-coated.

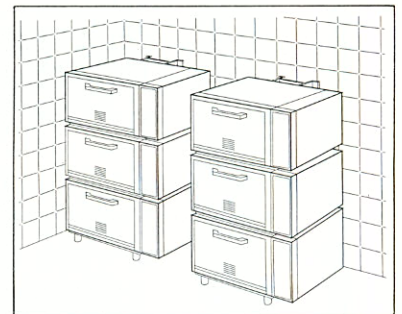


# ELECTRIC AUTOMATIC RICE COOKER

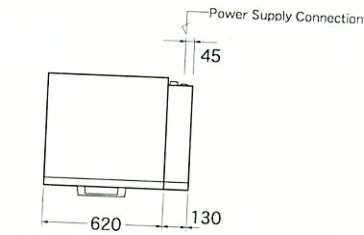




**FRC54NB**

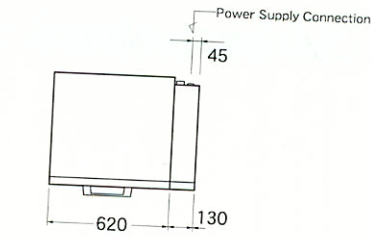


**FRC108NB**

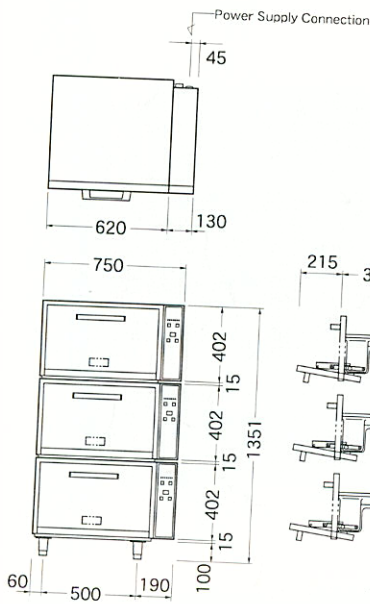

**FRC162NB**

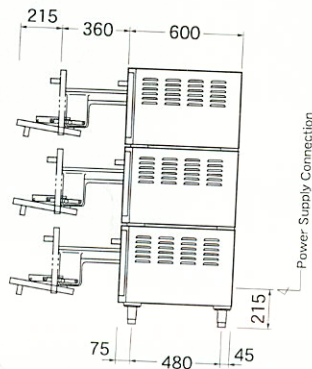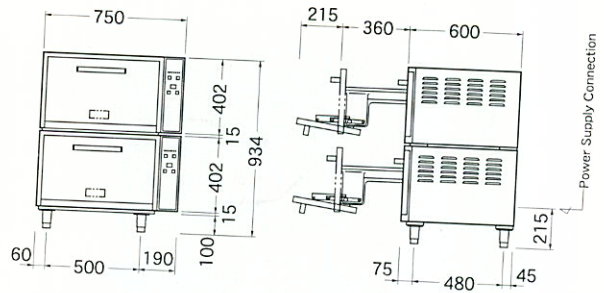

## Control Panel

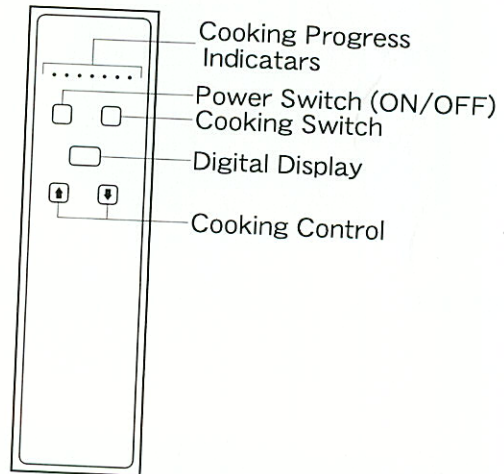

Model	Outer Dimensions (mm)			Capacity	Electric (3P 200 V)	Net weight	Packing size (cu.ft.)
	Width	Depth	Height				
FRC54NB	750	600	517	3.6 l ~ <sup>2.2</sup> 9 l / Load	5.4 kW	60 kg (132 lb)	25
FRC108NB	750	600	934	3.6 l ~ <sup>14.4</sup> 18 l / Load	10.8 kW	120 kg (265 lb)	37
FRC162NB	750	600	1,351	3.6 l ~ <sup>21.6</sup> 27 l / Load	16.2 kW	180 kg (397 lb)	49

※Local voltage is available.



**Joseph Lee & Co., Pty. Ltd.**

6/49 Derby Street, Silverwater,  
Sydney, New South Wales 2128 Australia.  
Tel: 02-9748-0868, 02-9748-7163, Fax: 02-9748-0869

Specifications subject to change without notice.